

THERMOBILE


mobile climate solutions

DESCRIPTION

PRODRY TD 100 DEHUMIDIFIER (50600900)

Fabr.year: 2015

- Model damaged on top
- 100% correct functioning
- Pcs available: 1
- Price: € 500.- net FCA

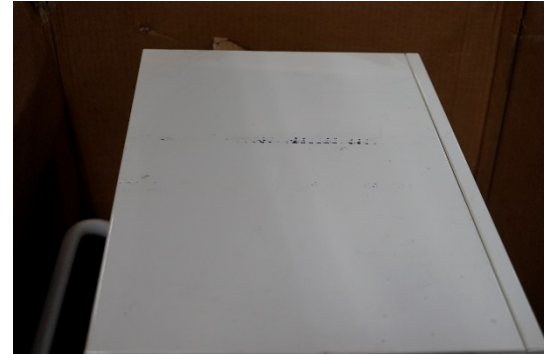

FEATURES

- The Prodry TD dehumidifier has a solid metal body work.
- Stackable construction.
- Automatic stop when the water container is full.
- Equipped with an hour counter, hygostat and a defrosting system.

ADVANTAGES

- A condensate pump is available as an accessory.
- The air filter can be easily cleaned and replaced.

APPLICATIONS

- Dehumidifying after water damage because of leakage.
- Drying of areas in construction sites or renovation projects.
- Management of humidity level.

WORKING PRINCIPLE

Areas are dehumidified according to the condensation principle.

TECHNICAL SPECIFICATIONS

| PRODRY SERIES | 45 | 80 | 100 |
|--------------------------------|----------------|--------------|-------------|
| Capacity Max. (l/24hr) | 44 | 79 | 100 |
| Capacity 20 C/60% RH (l/24hr) | 18 | 29 | 44 |
| Capacity 27 C/880% RH (l/24hr) | 37 | 56 | 79 |
| Capacity 32 C/80% RV (l/24hr) | 44 | 79 | 100 |
| Operating range °C | 3-32 | 3-32 | 3-32 |
| Operating range % RH | 50-90 | 50-90 | 50-90 |
| Airflow (m³/hr) | 700 | 1380 | 1380 |
| Power consumption (A) 230 V | 1.0 | 1.2 | 1.9 |
| Tank capacity (l) | 8.3 | 8.3 | 15.7 |
| Dimensions (L*W*H) cm | 54,5*52,5*89,5 | 54,5*56*96,5 | 59*62*107,5 |
| Weight (kg) | 37kg | 46kg | 50kg |